
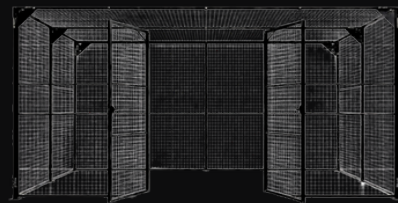


Mycelinks [®]
MICRO
CINEMA

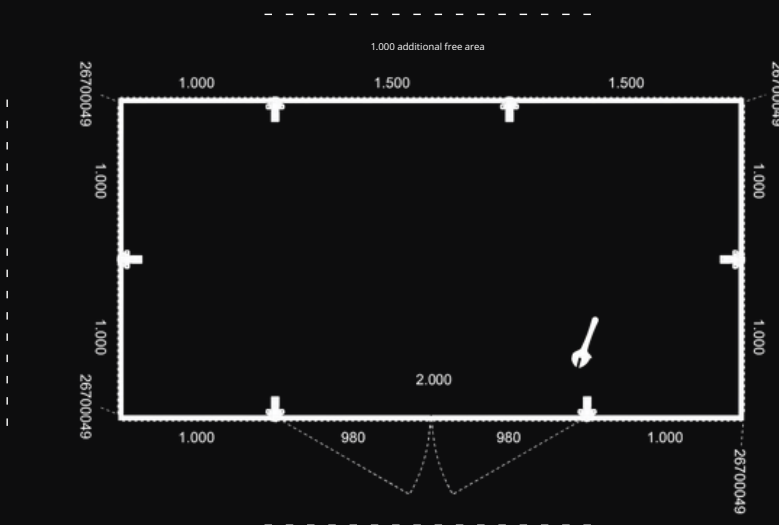

TROAX
certification

Power

- Standard 230V connection Outdoor certification
- Public-safe: protected against accidental contact
- Alternative: rechargeable zero-emission power station

Space

- Structure: 4 × 2 m
- Clearance: +1 m per side
- Surface: flat

Permits

- Public / semi-public space
- No special event permits required (small-scale format)
- Screening rights managed by Mycelens Oy

Structure

- Freestanding galvanised steel mesh structure Troax Cage UX450
- No anchoring required
- FR textile covering (600 D) + Inner textile layer FR (Rabering Molton)
- Closable (off-hours security)
- Assembly/disassembly: 2 hours / 2 persons

Ballast and Wind Resistance

- Total ballast: 240 kg
- Distribution: 60 kg per corner (4 support points)
- Design wind resistance (operational): up to 20 m/s

Design references:

- EN 13782 – Temporary structures – Tents
- EN 1991-1-4 – Eurocode 1: Wind Actions
- Finnish National Annex (SFS) to EN 1991-1-4

Terrain Category II-III, as defined in EN 1991-1-4.

The following pages contain supporting technical documentation



Sivu nro:1(2)

Päivämäärä
29-05-26
Tilaus nro
0000422822-1

Viitteemme
Niklas Andersson

Toimitusosoite

Mycelens
Maisemaalauksenkatu 4E
Bruno Lupi
00430 Helsinki
FINLAND

Toimitustapa
KAUKOKIITO

Toimituspäivämäärä
18-05-26

Toimitusehdot
VAPAASTI ASIAKKAALLA

Ostotilaus/Huomautukset
Mesh panels

Laskutusosoite

Mycelens Oy

Maisemamaalauksenkatu 4E 107
00430 Helsinki
FINLAND

ALV nro
36041509

Viitteenne
Bruno Lupi
Maksuehdot
30 pv netto

Eräpäivä
28-06-26

Korko veloitetaan eräpäivästä alkaen **15,50 %** per vuosi

Troax Nordic AB	Puhelin:	Pankki	VAT nr.
Juurakkokuja 4	010 321 4210	NORDEA	FI23199817
FI-01510 VANTAA	Fax:	Tili	IBAN FI3915963000081150
FINLAND	010 321 4219	159630-81150	BIC NDEAFIHH
			SE 556053-0809

Ilmoitettava maksettaessa	
Lasku nro	Asiakas nro
000117627	31473

Päivämäärä

29-05-26

Tilaus nro

0000422822-1

Viitteemme

Niklas Andersson

Toimitusosoite

Mycelens

Maisemaalauksenkatu 4E

Bruno Lupi

00430 Helsinki

FINLAND

Toimitustapa

KAUKOKIITO

Toimituspäivämäärä

18-05-26

Toimitusehdot

VAPAASTI ASIAKKAALLA

Ostotilaus/Huomautukset

Mesh panels

Laskutusosoite

Mycelens Oy

Maisemamaalauksenkatu 4E 107

00430 Helsinki

FINLAND

ALV nro

36041509

Viitteenne

Bruno Lupi

Maksuehdot

30 pv netto

Eräpäivä

28-06-26

Korko veloitetaan eräpäivästä alkaen 15,50 % per vuosi

Tuotenro	Tuote	Yhteensä	Yksikkö	Kappalehinta	Alennus %	Yhteensä
89050044	Pultti M8x55 kirist.	12,00	kpl			
89050042	Pultti M8x35	9,00	kpl			
89050525	Mutteri M8 (pyälletty)	21,00	kpl			
20500300	Itsepor. ruuvi 1/2/100	1,00	kpl			
20500370	Kit Selfd.scrw 4.8x19/100	1,00	kpl			
89050090	Kiila-ankkuri M10x89 FZB	18,00	kpl			
88754294	As.ohje leikkausprof.	1,00	kpl			
88754742	FM Partitioning System	1,00	kpl			
35700239	Kit 3-reikäkulma (10kpl)	2,00	kpl			
89200096	Päätyhattu 60x40 musta	6,00	kpl			
FI770001	Hyllylevy 1200x350 Koivuviiluvaneri	2,00	kpl			
MTRL	Materiaalit yhteensä	1,00	kpl			
TRSPTL	Fraktkostnad	1,00	kpl			

YHTEENSÄ

2.830,00

Haluatteko laskunne tulevaisuudessa PDF ?tiedostona?

Ilmoittakaa meille info@troax.fi

Yhteensä	Arvonlisäveroton summa	ALV	25,50 %	Pyöristys	Valuutta	Summa yhteensä
2.830,00	2.830,00		721,65	0,00-	EUR	3.551,65

Building Product Declaration**1. BASIC DATA**

Article name:

Mesh panels and posts

Article description:

Welded mesh on tubular frames and posts

Suppliers info

Company name:

Troax AB

Organisation number:

556093-5719

Address:

Tyngel 34, SE-335 74 HILLESRTORP

Contact person:

NA

E-mail:

info@troax.com

Telephone:

+4637082800

VAT number:

SE5560935719-01

Website:

www.troax.com

GLN:

NA

DUNS:

354258022

2. SUSTAINABILITY WORK**Company's certifications**

ISO 14001:2015 / ISO 9001:2015

The company has a code of conduct/policy/guidelines for dealing with social responsibility in the supplier chain, including subcontractors for ensuring the requirements

It's third-party audited

The data provider is solely responsible for data on articles/products that have been registered in the database.
The data provider and the Swedish Association of Construction Product Industries cannot be held responsible for correct information incorrectly entered into the database.

Adress / Address

Troax AB

Box 89

SE-335 04 Hillerstorp

Sweden

Telefon / Telephone

+46 (0)370 828 00

Fax

+46 (0)370 824 86

Org.nr / Reg.No.

556093-5719

Hemsida / Websitewww.troax.com**E-mail**info@troax.com

3. DECLARATION OF CONTENTS

Chemical content according to REACH and European regulations

Component				
Material				
E220-CR2	Tubes	50%	EN 10305-5	
S235JR	Mesh/ Wires	48%	EN 10277-2	
GB76 SG3 F300	Welding material	0,5%	EN-ISO 14341	
ALESTA EP Hybrid	Powder coating	1,5%	ROHS n 2002/95/95	
Additional or Zink	Galvanized material	1,5%	EN-ISO 1461-2009	

4. RAW MATERIALS

Renewable material

Enter proportion of renewable material in the article
(short cycle, less than 10 years):

81%

5. CONSTRUCTION PHASE

Does the article make special requirements in storage?

Stored in dry environment

6. DEMOLITION

Is the article prepared for disassembly (dismantling)?

Yes

Does the article require special measures for protection of health and
environment in demolition/disassembly?

No

The data provider is solely responsible for data on articles/products that have been registered in the database.
The data provider and the Swedish Association of Construction Product Industries cannot be held responsible for correct information incorrectly entered into the database.

7. WASTE MANAGEMENT

Delivered article

Is the supplied article covered by the Ordinance (2014:1075) on producer responsibility for electrical and electronic products when it becomes waste?

No

Is reuse possible for the whole or parts of the article when it becomes waste?

Yes

Is material recovery possible for the whole or parts of the article when it becomes waste?

Yes

Is energy recovery possible for the whole or parts of the article when it becomes waste?

NA

Does the supplier have restrictions and recommendation for re-use, material or energy recovery or landfilling?

No

When the supplied article becomes waste, is it classified as hazardous waste?

No

Mounted article

Is the mounted article classified as hazardous waste?

No

8. INDOOR ENVIRONMENT

The article is intended for indoor use

The article does not produce any emissions

Paints and varnishes

The article is to certain level resistant to fungi and algae in use in wet areas



Environment & Quality Manager
Troax AB

The data provider is solely responsible for data on articles/products that have been registered in the database.
The data provider and the Swedish Association of Construction Product Industries cannot be held responsible for correct information incorrectly entered into the database.



TROAX CAGE



PROTECTING PEOPLE, PROPERTY, AND PROCESSES.



QUICK AND EASY
INSTALLATION

270° OPENING
OF BOTH DOORS

OUTDOOR AND
INDOOR USE

MODULAR AND
FLEXIBLE

FF
FO
DI
AI
ER

**SAFETY IS
ABOUT BEING
ONE STEP
AHEAD.**

FROM 200 MM, UP TO THE INFINITY.

Troax Cage is a flexible and modular construction, and all depths are possible – it can even be tailored from 200 mm up to the infinity. Also, depth can be extended when needed.

It is available in six standard sizes and it is built up using UX450 mesh panels. These panels can easily be modified on-site if your application should change.

STANDARD CAGE DIMENSIONS

Height (mm)	Width (mm)	Depth (mm)
2,200	1,200	1,200
2,200	2,200	1,200
2,200	2,200	2,400
2,200	2,200	3,600
2,200	2,200	4,800
2,200	2,200	6,000

With the Extension kit, it is possible to add depth to the cage.
Mesh size: 50×50 mm, tube 30×20 mm, wire 3×3,75 mm.
As standard lock option, you can choose between padlock, Assa- or Euro cylinder.

TROAX IS PROUD TO BE THE
MARKET LEADER WITHIN OUR
FIELD, AND FOR MORE THAN
60 YEARS WE HAVE LET OUR
CUSTOMERS LEAD THE WAY
TOWARDS MORE INTELLIGENT
PRODUCTS TO PROTECT PEOPLE,
PROPERTY, AND PROCESSES.



FLEXIBLE SOLUTIONS. SAFE HANDLING.

Troax Cage is a quick and easy anti-theft solution, suitable for warehouses or on construction sites. Its freestanding design and construction makes it particularly suitable for storing hazardous materials and protecting against theft or vandalism.

The sturdy mesh panels of the cage allows great visibility and control over the stored items.

Troax Cage is easy to assembly and can be used for both temporary and permanent installations. A double door of 1,000+1,200 mm allows an easy access for forklifts, and the unique design of the hinge enables a 270 degrees opening of both doors.

The mesh panels are available in both grey RAL 7037 for indoor use, and Hot Dip Galvanized finish, which makes it ideal for outdoor use.

**FREESTANDING.
FOR ANY
DIMENSION
AND ANY
ENVIRONMENT.**




MAKING YOUR WORLD SAFE



PANEL UX450 PARTITIONING SYSTEM

Panel UX 450 is available in 2 heights, 2200 mm and 800 mm, and in 8 widths between 200 mm up to 1500 mm. The mesh, constructed from press welded 3x3.75 mm wires with mesh aperture 50x50 mm, is welded to a 30x20 mm tubular frame for added strength. The system is fully demountable and relocatable.

Panels are supplied powder coated as standard with a grey RAL 7037 finish, however other RAL colours are available upon request. Panels can also be supplied hot dip galvanized for external use or in cold storage areas.

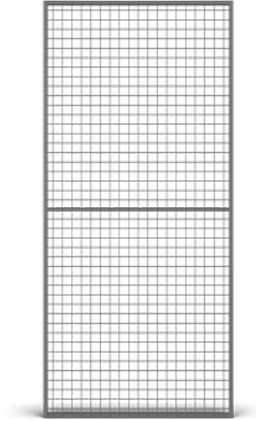

FACTS


ART. NO	COMPONENTS	HEIGHT (mm)	WIDTH (mm)	MESH SIZE (mm)	FRAME (mm)
36020001	Panel UX450 2200x200	2200	200	50x50	30x20
36020011	Panel UX450 800x200	800	200	50x50	30x20
36030001	Panel UX450 2200x300	2200	300	50x50	30x20
36030011	Panel UX450 800x300	800	300	50x50	30x20
36050001	Panel UX450 2200x500	2200	500	50x50	30x20
36050011	Panel UX450 800x500	800	500	50x50	30x20
36070001	Panel UX450 2200x700	2200	700	50x50	30x20
36070011	Panel UX450 800x700	800	700	50x50	30x20
36080001	Panel UX450 2200x800	2200	800	50x50	30x20
36080011	Panel UX450 800x800	800	800	50x50	30x20
36100001	Panel UX450 2200x1000	2200	1000	50x50	30x20
36100011	Panel UX450 800x1000	800	1000	50x50	30x20
36118011	Panel UX450 800x1180	800	1180	50x50	30x20
36120001	Panel UX450 2200x1200	2200	1200	50x50	30x20
36120011	Panel UX450 800x1200	800	1200	50x50	30x20

ART. NO	COMPONENTS	HEIGHT (mm)	WIDTH (mm)	MESH SIZE (mm)	FRAME (mm)
36150001	Panel UX450 2200x1500	2200	1500	50x50	30x20
36150011	Panel UX450 800x1500	800	1500	50x50	30x20

Finish on panels, posts and powder coated accessories has the last figure variants in **ART. NO.**

"1" = RAL 7037 Dusty Grey; "2" RAL 1018 Zink Yellow; "5" All other RAL colours or cut/welded; "6" RAL 9005 Jet Black, "8" Hot dip galvanized

ACCESSORIES



END PROFILE UR/UX

CUT PROFILE
PARTITIONING AND
ANTI-COLLAPSEEND RAISING FOOT
UR/UX

CORNER BRACKET

RAISING FOOT UR/
UX




COMBINE WITH



POST 60X40 WP

SAFE FIX 60X40
BRACKETPOST 80X80 WP
NEWPANEL UR325
PARTITIONING
SYSTEMSAFE FIX 80X80
BRACKET

IMAGES

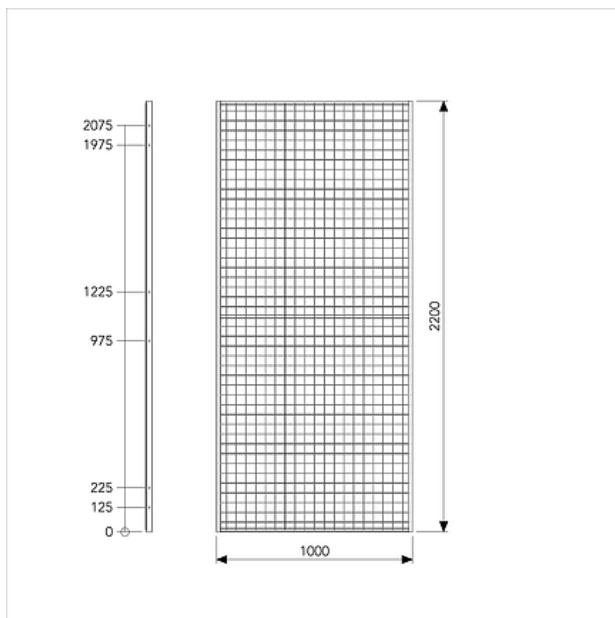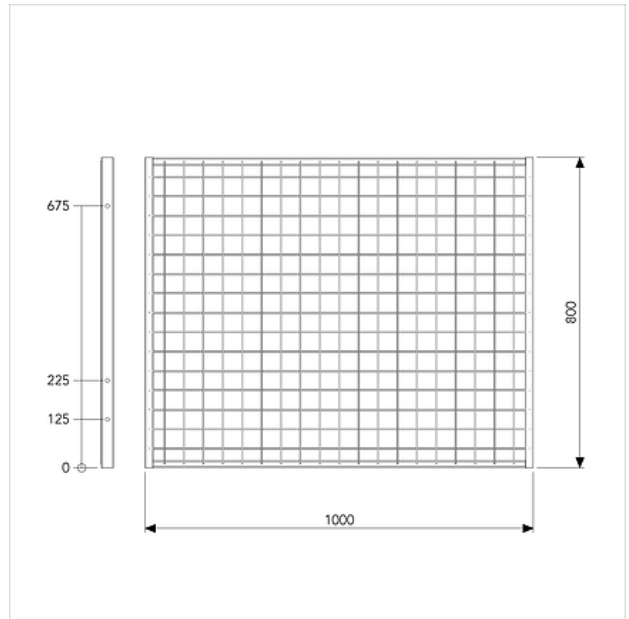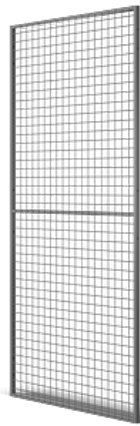

ART STORAGE

The base of the art storage system is the UX450 panel. Its 30x20 tubular frame, 3x3.75mm wire and 50x50 mm mesh aperture, is well suited to carry paintings. The door sections with its UX450 panels are combined with 60x40 posts, Z-beams, aluminium rails and floor guides along with other system components.

Maximum door section width is 3000 mm using a standard panel height of 2200 mm.

Maximum loading capacity per door section is approximately 130 kg, depending on the width, as the maximum total weight of the door section shall not exceed 160 kg with the load included.

Standard distance between each door section is c/c 360 mm. There are no limits on how many door sections can be placed in a row, but for the self-supported option, standing on the floor, a post must be used for every 6 door sections.


Panels and posts are supplied powder coated in grey RAL 7037 finish, however other RAL colours are available upon request.



FACTS

ART. NO	COMPONENTS
36501500	Floor guide Art storage
36501501	Rail support z-beam Art storage
36501502	Rail support ceiling Art storage
36501503	Threaded rod M10x500 Art storage
36907940	Kit 7940 Runner boogie Art storage

COMBINE WITH



PANEL UX450



POST 60X40 WP




ROOF BEAM



ART STORAGE

PROPERTY PROTECTION
WAREHOUSE PARTITIONING

IMAGES

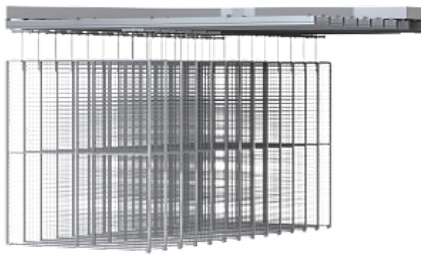

INVOICE

Mycelens Oy
Maisemamaalauksenkatu 4 E 107
00430 Helsinki

Payable	840,00 EUR
Invoice date	30.4.2026
Invoice No.	673
Recipient name	F.TENT OY
IBAN	FI70 5000 0120 4224 30
BIC	OKOYFIHH
Reference number	10214 05641
Due date	7.5.2026

material KODURA PLUS 600x600D black


Description	Product code	Amount	VAT excluded unit price	VAT %	Total incl. VAT
Manufacturing a tent according to the customer's dimensions	KOD 600	1 kpl	669,323	25,5 %	840,00
Order date			VAT included unit price		
30.4.2026			840,000		
Quantity invoiced					
1 kpl					

VAT specification	
VAT excluded	669,32 EUR
VAT	170,68 EUR
VAT 25,5 %	170,68 EUR (669,32 EUR)

INVOICE TOTAL: 840,00 EUR

Virtual bank bar code: 470500001204224300008400000000000000001021405641260507

F.TENT OY	0417175810	FI70 5000 0120 4224 30
Kivikonlaita 22 varasto 31	f.tentoy@gmail.com	OKOYFIHH
00940 HELSINKI	https://www.ftent.fi/	
Business ID: 2817760-9		
Recipient's account number	IBAN OKOYFIHH FI70 5000 0120 4224 30	
Recipient	F.TENT OY	
Payer's name and address	Mycelens Oy Maisemamaalauksenkatu 4 E 107 00430 Helsinki	
Signature		
From account no.	Ref. No. 10214 05641	
	Due date 7.5.2026	Euro 840,00



The payment will be cleared for the recipient in accordance with the General terms for payment transmission and only on the basis of the account number given by the payer.



Soluții pentru publicitate și decor

Verlatex Tent FR

BRIEF DESCRIPTION

- 100% polyester fabric with 600D x 600D woven base, matte
- Super strong tensile, tear strength & water resistance feature, making it perfect as tent fabric

FEATURES



INK PRINTABILITY



MATERIAL DETAILS

Properties	Teste method	Metric	Imperial
Total Weight	DIN EN ISO 2286-2, ASTM D751	270 g/sq.m	7.9 oz/sq.yd
Base Fabric	DIN 60001, ASTM D7641	100%polyester	100%polyester
Weave Method	N/A	Woven	
Shrinkage	210 °C, 30s	≤3%	
Flame Resistance	DIN 4102-1-B1, NFPA 701 Test1	IN 4102-1-B1, NFPA 701 Test1	
Recommend Fixation Temperature	N/A	190°C - 210-°C, 1-2min	
Yellowing Temperature	SUPRKC REX-C400, 30s	≥210°C	
Width Available	DIN EN ISO 3759, ASTM D751-2006	Max 320 cm	126"
Standard Lenght	DIN EN ISO 3759, ASTM D751-2006	50m	55yds

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All of the Information above shall only be used as a guide; buyers shall independently test and determine the product's suitability. The mentioned data is available as test results and should not be used for the purpose of a lawsuit or warranty.





Steppenbergs Vertriebs GmbH - Am Schlosspark 2 - 01471 Radeburg

Firma

Mycelens Oy - Visual Ecosystem
Maisemamaalauksenkatu 4E
00430 HELSINKI
FINNLAND

Rechnung

Vorgangsnummer 57779
Belegnummer 2026-10693
Datum 15.05.2026
Kundennummer D412933
Bearbeiter Bätz

Bitte bei allen Rückfragen angeben !

Versandart	DPD	Unsere UStIDNr	DE309656785
Lieferbedingung	Ab Werk	Unsere SteuerNr	209/120/02854
Bezug	Auftragsbestätigung 2026-40342	Ihre UStIDNr	
Ihr Zeichen	contact@mycelens.com		
Ihr Beleg			

Pos.	Artikelnr.	Bezeichnung	Termin	Menge ME	Einzelpreis	Gesamtpreis	SC
1	500050	Backdrop Made of Molton black, flame retardant according to DIN 4102 B 1 300 g/m ² , brushed on both sides Standard for stage, photo, etc. Made in Germany, 1 A quality. # width: 3,90m # height: 1,90m # all sides: webbing with eyelets every 20cm (16mm inner diameter)	15.05.2026	1 piece	76,30	76,30	101
2	500050	Backdrop Made of Molton black, flame retardant according to DIN 4102 B 1 300 g/m ² , brushed on both sides Standard for stage, photo, etc. Made in Germany, 1 A quality. # width: 1,90m # height: 2,00m # Top edge: webbing with eyelets every 50cm (16mm inner diameter) # Sides: webbing with eyelets every 50cm (16mm inner diameter) # Bottom edge: lead cord Please note that cotton may shrink depending on the humidity and room temperature. Not washable !	15.05.2026	2 piece	66,20	132,40	101

Übertrag 208,70

HRB 32299 beim Amtsgericht Dresden
Geschäftsführer: Falk Klotzsche
Telefon: +49.35208.34773
Telefon: +49.35208.34848
Mail: info@Rabenring.com
Fax: +49.35208.341959

Bankverbindung für die EU:
IBAN: DE 34 8504 0000 0207 6248 00 BIC: COBADEFFXXX
Bankverbindung für die Schweiz:
Konto: CH 18 0900 0000 6197 1759 3 Postfinance

Pos.	Artikelnr.	Bezeichnung	Termin	Menge ME	Einzelpreis	Gesamtpreis	SC
3	500050	Backdrop Made of Molton black, flame retardant according to DIN 4102 B 1 300 g/m², brushed on both sides Standard for stage, photo, etc. Made in Germany, 1 A quality. # width: 3,90m # height: 2,00m # Top edge: webbing with eyelets every 50cm (16mm inner diameter) # Sides: webbing with eyelets every 50cm (16mm inner diameter) # Bottom edge: lead cord Please note that cotton may shrink depending on the humidity and room temperature. Not washable !	15.05.2026	1 piece	75,40	75,40	101
4	500050	Backdrop Made of Molton black, flame retardant according to DIN 4102 B 1 300 g/m², brushed on both sides Standard for stage, photo, etc. Made in Germany, 1 A quality. # width: 0,95m # height: 2,00m # Top edge: webbing with eyelets every 50cm (16mm inner diameter) # Sides: webbing with eyelets every 50cm (16mm inner diameter) # Bottom edge: lead cord Please note that cotton may shrink depending on the humidity and room temperature. Not washable !	15.05.2026	2 piece	57,70	115,40	101
5	500050	Backdrop Made of Molton RED, flame retardant according to DIN 4102 B 1 300 g/m², brushed on both sides Standard for stage, photo, etc. Made in Germany, 1 A quality. # width: 1,00m # height: 2,00m # Top edge: webbing with eyelets every 50cm (16mm inner diameter) # Sides: hemmed # Bottom edge: hemmed Please note that cotton may shrink depending on the humidity and room temperature. Not washable !	15.05.2026	2 piece	54,90	109,80	101
Zwischensumme					EUR	509,30	SC
zzgl. cargo						55,00	101
Zwischensumme						564,30	
zzgl. MwSt. mit Steuercode			101	19,00 % von	564,30	107,22	
Endsumme					EUR	671,52	

HRB 32299 beim Amtsgericht Dresden
Geschäftsführer: Falk Klotsche
Telefon: +49.35208.34773
Telefon: +49.35208.34848
Mail: info@Rabenring.com
Fax: +49.35208.341959

Bankverbindung für die EU:
IBAN: DE 34 8504 0000 0207 6248 00 BIC: COBADEFFXXX
Bankverbindung für die Schweiz:
Konto: CH 18 0900 0000 6197 1759 3 Postfinance


Zahlungsvereinbarungen:

Zahlung erfolgt durch sofort	Vorkasse	ohne Abzug	671,52 EUR
---------------------------------	----------	------------	------------

HRB 32299 beim Amtsgericht Dresden
Geschäftsführer: Falk Klotsche
Telefon: +49.35208.34773
Telefon: +49.35208.34848
Mail: info@Rabenring.com
Fax: +49.35208.341959

Bankverbindung für die EU:
IBAN: DE 34 8504 0000 0207 6248 00 BIC: COBADEFFXXX
Bankverbindung für die Schweiz:
Konto: CH 18 0900 0000 6197 1759 3 Postfinance

Kuitti / Takuu



Osoite

Bruno Lupi
Maisemamaalauksenkatu 4E 107
FI-00430 Helsinki

Laskutusosoite

Bruno Lupi
Maisemamaalauksenkatu 4E 107
FI-00430 Helsinki

Tuotenumero	Nimike	Määrä	Yksikköhinta (Sis. ALV)	ALV	Summa (Sis. ALV)
36-6151	Jatkojohto ulkokäyttöön maadoitettu, 20 metriä	1	24,95	25,5%	24,95
36-9597	Brennenstuhl 5-osainen jatkojohto ulkokäyttöön, 5 m	1	29,95	25,5%	29,95

Kaikki tuotteet yhteensä	54,90
Toimituskulut	3,90
Maksutapamaksu	0,00
Maksutapa	Klarna/Billie

Loppusumma (EUR)	58,80
ALV (25,5%)	11,95

INVOICE

Mycelens Oy
Maisemamaalauksenkatu 4 E 107
00430 Helsinki


Payable	350,00 EUR
Invoice date	14.6.2026
Invoice No.	734
Recipient name	F.TENT OY
IBAN	FI70 5000 0120 4224 30
BIC	OKOYFIHH
Reference number	10214 06268
Due date	18.6.2026

Description	Product code	Amount	VAT excluded unit price	VAT %	Total incl. VAT
Fire-resistant PVC awning 440x240cm Quantity invoiced 1 kpl	PVC440	1 kpl	278,884 VAT included unit price 350,000	25,5 %	350,00
VAT specification					
VAT excluded		278,88 EUR			
VAT		71,12 EUR			
VAT 25,5 %		71,12 EUR (278,88 EUR)			

INVOICE TOTAL: 350,00 EUR

Virtual bank bar code: 47050000120422430000350000000000000000001021406268260618

F.TENT OY Kivikonlaita 22 varasto 31 00940 HELSINKI		Business ID: 2817760-9		0417175810 f.tentoy@gmail.com https://www.ftent.fi/		FI70 5000 0120 4224 30 OKOYFIHH	
CREDIT TRANSFER	Recipient's account number	IBAN OKOYFIHH FI70 5000 0120 4224 30					
	Recipient	F.TENT OY					
	Payer's name and address	Mycelens Oy Maisemamaalauksenkatu 4 E 107 00430 Helsinki					
	Signature						
		Ref. No.	10214 06268				
From account no.				Due date	18.6.2026	Euro	350,00



The payment will be cleared for the recipient in accordance with the General terms for payment transmission and only on the basis of the account number given by the payer.



Technical datasheet No.: **1042.10**

Product: **POLYMAR®** POLYMAR FR 600

Article No.: 8851 5340

Type of coating and finish			
Type of coating	PVC		
Burning behaviour	BS 7837, DIN 4102: B1, NFP 92507: M2, FAR 25853(A)-App.F Part I para (a)(1) (iv-v) (0 mm/min)		
for Burning behaviour	always check validity of fire certificate, also check country-specific validity		
Total weight	600 g/m ²	EN ISO 2286-2	
Tensile strength warp/weft	2200 / 2100 N/50 mm	EN ISO 1421/V1	
Tear strength warp/weft	230 / 230 N	DIN 53363	
Adhesion	16 N/cm	PA 09.03 (intern)	
Cold resistance	-40 °C	EN 1876-1	
High Temperature	+70 °C	PA 07.04 (intern)	
Light fastness	>6 Note, Value	EN ISO 105 B02	
Crack resistance	no cracks	100000 x	DIN 53359 A
Base fabric			
Material	PES	DIN EN ISO 2076	
Yarn count	1100 dtex	DIN EN ISO 2060	
Weave	L 1/1	ISO 3572	

These indicated technical data are based on average results. Due to production procedures deviations up to -5% can occur. All technical data are in accordance with the present standard of knowledge and give product information without legal binding. All data apply to new products. Applications suggested do not release the customer to test material for its intended application.